

## ARGO® HAZ-LO® INTRINSICALLY SAFE AAA BATTERY-POWERED HEADLAMP

**MARKET**

**APPLICATIONS:** Professional Light - Industrial, Hardware/Tool, Automotive, Sporting Goods, Consumer, Emergency Medical Services, Safety, Pest Control, Boating, Aviation.

**DESCRIPTION:** The Argo® Haz-Lo® intrinsically safe headlamp features a single C4® LED with two output modes. It features low mode for “up close task lighting” and high for long distance lighting needs. The light is packaged with an elastic headstrap and rubber hard hat strap.

**CASE MATERIAL:** Tough thermoplastic construction with elastomer over mold. C1/D1 model available in yellow. ATEX/IECEx model available in yellow or orange.

**DIMENSIONS:** Face Cap Diameter: 1.75 in. (4.45cm)      Maximum Width: 2.70 in (6.85 cm)  
Maximum Depth (including head strap mounting plate): 2.40 in. (6.09 cm)

**WEIGHT:** 5.40 oz (153 grams) with alkaline batteries (included with purchase).

**LENS:** Unbreakable polycarbonate lens.

**LIGHT SOURCE:** One (1) White C4® LED, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:** Low - 20 lumens, 700 candela peak beam intensity, and 53 meter beam distance.  
High - 90 Lumens, 3,200 candela peak beam intensity, and 113 meter beam distance.



**ON/OFF:** Push-button switch - Sequences through Low, High and Off.

**RUN TIME:** See chart for run time data. All runtime claims are to 10% of initial lumen output.

**BATTERY:** Three (3) “AAA” size, Alkaline or Lithium batteries.

**FEATURES:** C4® LED technology for extreme brightness.



IPX4 rated for water resistant operation.


2 meter impact resistance tested.

90° tilting head.

Rubber hard hat strap.

Operates on AAA lithium batteries for extended runtime or extreme temperatures.

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**APPROVALS\*:**  Class 1, Div 1, Groups A,B,C,D; Class II, Div 1, Groups E,F,G; Class III; T-Class: T4 Exia. (Approved using: Energizer E92, Duracell MN2400, Rayovac No. 824 and Panasonic AM-4 alkaline batteries or Energizer EA92 and Energizer L92 lithium batteries)



ITS 14 ATEX 28062; IECEx ETL 14.0038

II 1G Ex ia IIA T4 Ga; II 2G Ex ib IIB T4 Gb (Approved using: Rayovac No. 824 and Panasonic AM-4 alkaline batteries or Energizer EA92 and L92 lithium batteries)



Meets applicable European Community directives.

**OPTIONAL**
**ACCESSORIES:**





N/A


OUTPUT

RUNTIME

DISTANCE

INTENSITY

FL1 STANDARD	LOW	HIGH
	20 LUMENS	90 LUMENS
	50h	8h
	53m	113m
	700cd	3,200cd

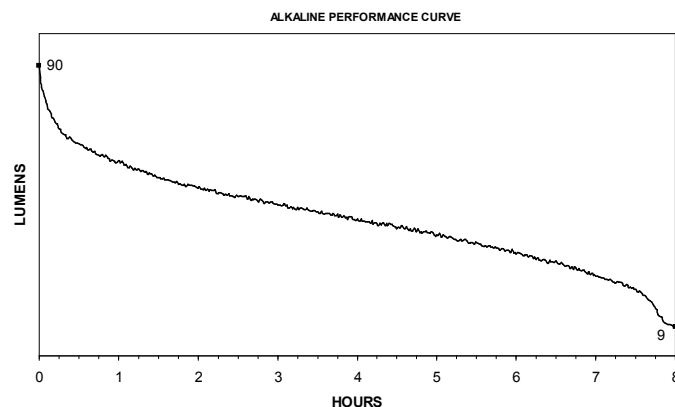

\* See product for specific ratings.

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 03/17/2014

Revised: 10/28/2015 Rev: 3

Made in China.

Document #193