



PRODUCT FACT SHEET

ULTRASTINGER® LED HIGH LUMEN LONG RANGE RECHARGEABLE FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer.

DESCRIPTION: 1,100 lumens of blinding light coupled with 65,000 candela for a far reaching beam, the UltraStinger® LED is the newest and brightest addition to the Stinger® series. The UltraStinger® LED offers 3 microprocessor controlled variable intensity modes, strobe mode and the latest in high powered LED technology. In addition the UltraStinger® LED also offers three different user selectable programs.

CASE MATERIAL: 6000 series machined aircraft aluminum with non-slip rubberized comfort grip.

DIMENSIONS: Length: 11.82 in. (30 cm) Diameter: Major Diameter: 2.37 in. (6.01 cm)
Body Diameter: 1.19 in. (3 cm)

WEIGHT: 19.9 oz. (564 grams) with battery (included in purchase)

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See Chart. Optimized electronics provides regulated intensity. Custom "Total Internal Reflection" optic for narrow beam and optimum peripheral illumination.



ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. TEN-TAP® programmable switch allows user selection of one of three different programs: High/medium/low with strobe (factory default), high only without strobe, or high/medium/low without Strobe.

RUN TIME: See Chart. All claims to 10% of initial lumen output. Strobe: 3 hours 15 minutes.

BATTERY: 5-cell, 6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times.

CHARGING: Fits existing Stinger® chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC charge cords. 2.5 hour fast charger also available.*

FEATURES: C4® LED technology for extreme brightness.




IPX4 Rated for water resistant operation.
3 meter impact resistance tested.
LED Solid State Power Regulation provides maximum light output throughout battery life.
TEN-TAP® programmable switch allows user to select one of three different programs.
Serialized for positive identification.
LED Charge-continuity indicator on charger base.
Compact, snap-in charger mounts in any position.

WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS: N/A

OPTIONAL ACCESSORIES: Safety wands, ring holder, 5-Unit Back Charger, 2.5-hour fast charger and 120 Volt Fast Charge Cord.*

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT	1,100 LUMENS	1,100 LUMENS	350 LUMENS	90 LUMENS
RUN TIME	1h 30min	1h 30min	4h 30min	16h
DISTANCE	510m	510m	290m	141m
INTENSITY	65,000cd	65,000cd	21,000cd	5,000cd

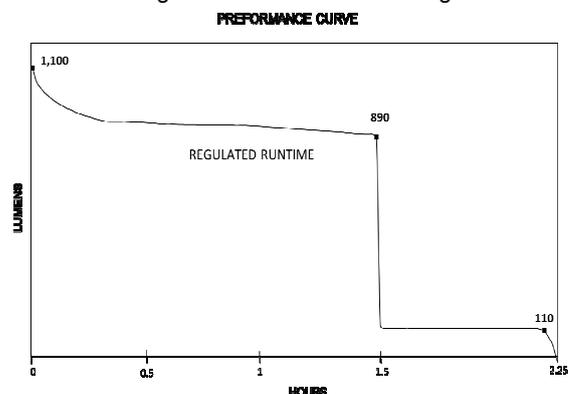

* 120 Volt AC Fast Charge Cord P/N 22665, or DC P/N 22051 vehicle cord required to fast charge an UltraStinger® LED.

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 12/23/2014

Revised:

Rev: 0

Assembled In The USA.

Document #231