



PRODUCT FACT SHEET

4AA PROPOLYMAX™ HIGH PERFORMANCE ALKALINE FLASHLIGHT

MARKET

APPLICATIONS: Hardware/Tool, Industrial, Automotive, Sporting Goods, Consumer, Fire & Rescue, Occupational Safety.

DESCRIPTION: With 300 lumens of light, the 4AA PROPOLYMAX™ is the brightest addition to the ProPolymer series. The 4AA PROPOLYMAX™ offers the latest in C4® LED technology and three different user selectable programs. It features a sealed tailcap switch for user selectable momentary or constant on operation, mechanical battery polarity protection and a body constructed of a engineering polymer resin that is virtually indestructible, shock resistant, non-conductive and light weight.

CASE MATERIAL: Impact and chemical resistant Engineering Polymer resin; o-ring sealed and vented. Available in high visibility yellow, orange or black.

DIMENSIONS: Length: 7.00 in. (17.78 cm) Body thickness: 1.05 in. (2.67 cm) Width: 1.50 in. (3.81 cm)
Face cap diameter: 1.93 in. (4.90 cm)

WEIGHT: 8.2 oz (233 grams) with batteries (included with purchase).

LENS: Unbreakable polycarbonate lens with scratch resistant coating.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart. Optimized electronics provides regulated intensity.
Smooth parabolic reflector produces a tight beam with optimum peripheral illumination.
Electronically regulated.



ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/low/strobe (factory default), high only or low/high.

RUN TIME: See chart. All claims to 10% of initial lumen output. Strobe: 6 continuous hours.

BATTERY: Four (4) "AA" size alkaline batteries.

FEATURES: C4® LED technology for extreme brightness.
3 meter impact resistance tested.




IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes; IPx4 for water spray.

Non-conductive and corrosion proof.

TEN-TAP™ programmable switch allows user to select one of three different programs.

Deep parabolic reflector produces long range brilliance and smooth uniform beam pattern.

Electronically regulated.

APPROVALS:  UL Listed Class I, Division 2, Groups A,B,C,D;
Class II, Division 2, Groups F,G; Class III; Temperature Code T4








Meets applicable European Community Directives.

WARRANTY: Streamlight's Limited Lifetime Warranty

OPTIONAL

ACCESSORIES: Helmet Mounts, Belt Clip, Traffic Wand, Holster

	FL1 STANDARD	HIGH	LOW
OUTPUT		300 LUMENS	50 LUMENS
RUNTIME		2h 45min	24h
DISTANCE		261m	100m
INTENSITY		17,000cd	2,500cd

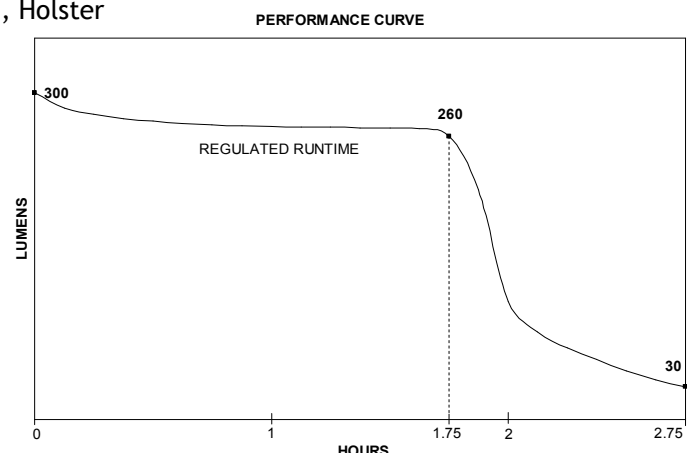

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 03/05/2013

Revised: 05/14/2013 Rev: 2

Assembled In the USA

Document #168