


Installation of the EX-02 Pocket Clip Kit

Important: Do not remove safety screw without tool. See instructions below.

- 1) Remove the existing pocket clip.
- 2) Remove and replace the scale screws (shortest screw) one side at a time.
- 3) Remove the pivot pin screw (largest screw) and install the new one. Fully tighten the new pivot pin screw then loosen one quarter of a turn and re-tighten to desired setting. Check the action of the blade. Tighten or loosen screw until blade operates smoothly and without wobble.
- 4) To change the safety screw, open the knife and engage the safety.
- 5) Insert the supplied wooden dowel into the knife through the finger cut-out slightly below the safety. Keep pressure on this while removing the safety screw and replacing it with the new safety screw. **Do not move the safety while the screw is out.**

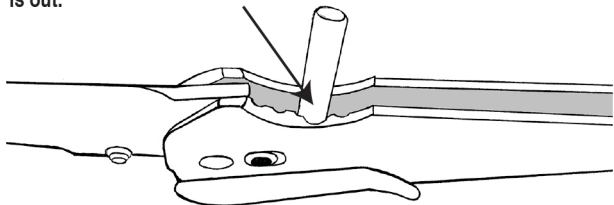

- 6) Install the new belt clip. Use caution when tightening the new pocket clip screws. The fine threads on the replacement screws will strip if overtightened.

Package Contents:

- | | |
|----------------|-------------------|
| 1 Belt Clip | 1 Safety Screw |
| 1 Torx Wrench | 2 Belt Clip Screw |
| 1 Pivot Screw | 1 Wooden Dowel |
| 4 Scale Screws | |

For assistance with installation of this kit
or any related questions,
please call **1-800-GETGRIP**
or email us at **support@hogueinc.com**



1-800-GETGRIP
www.hogueinc.com